


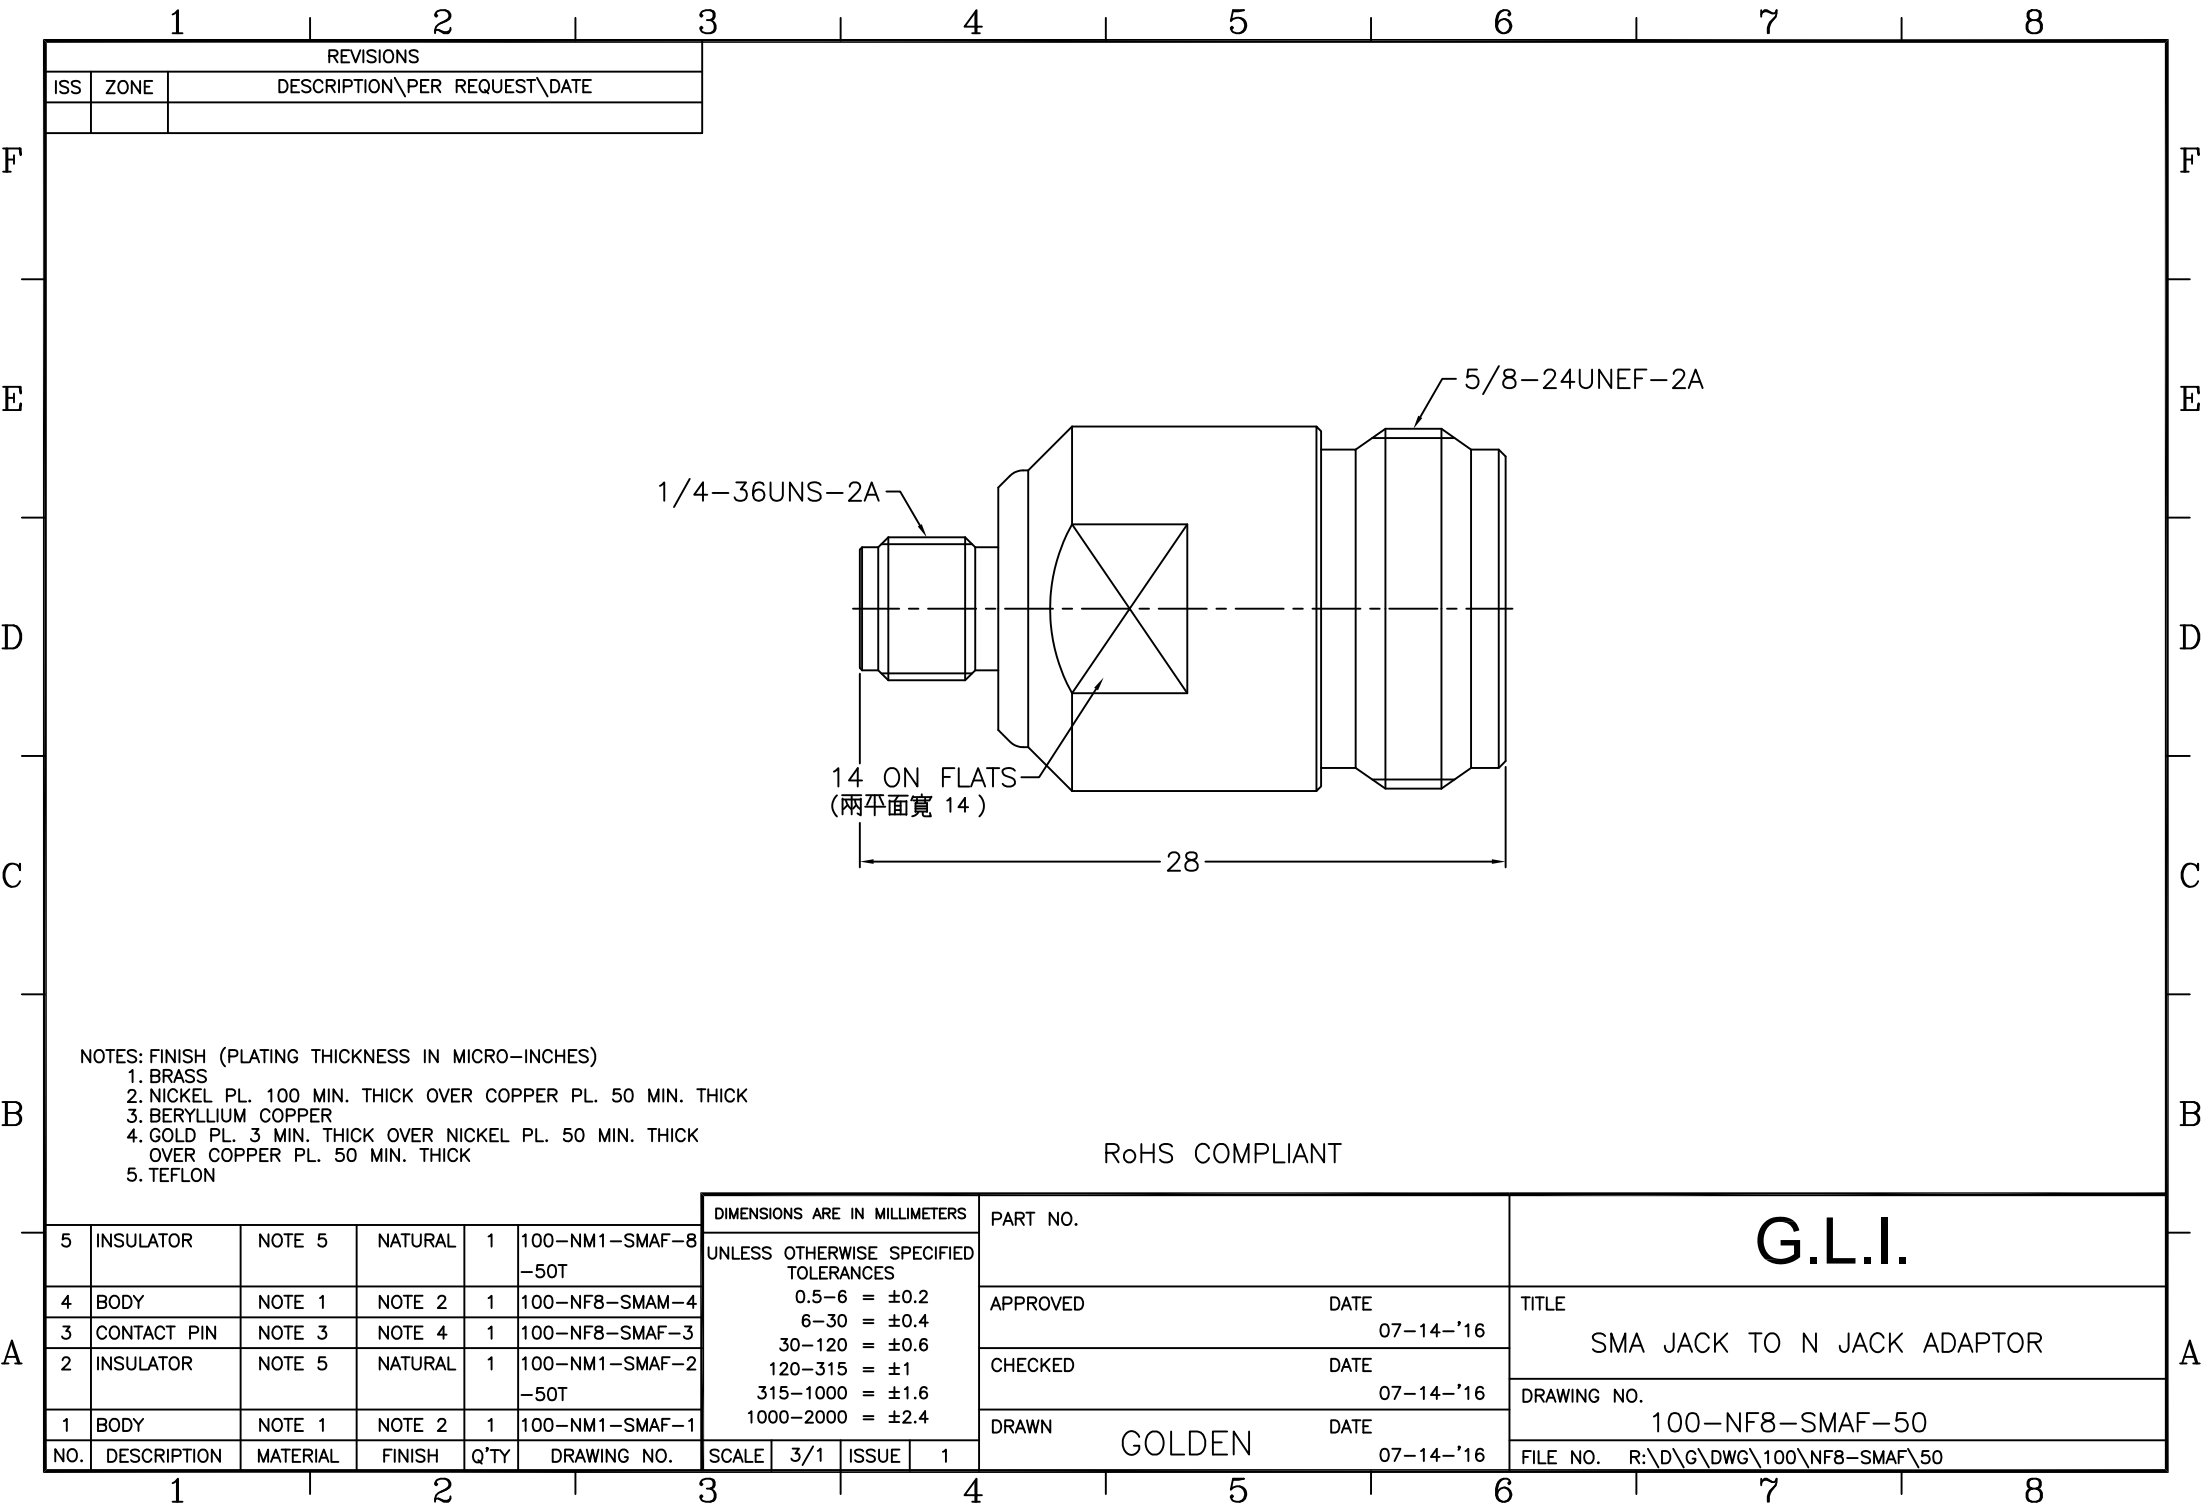

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK
3. BERYLLIUM COPPER
4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK
OVER COPPER PL. 50 MIN. THICK
5. TEFLON

RoHS COMPLIANT

						DIMENSIONS ARE IN MILLIMETERS				PART NO.		G.L.I.		
5	INSULATOR	NOTE 5	NATURAL	1	100-NM1-SMAF-8-50T	UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4								
4	BODY	NOTE 1	NOTE 2	1	100-NF8-SMAM-4									
3	CONTACT PIN	NOTE 3	NOTE 4	1	100-NF8-SMAF-3									
2	INSULATOR	NOTE 5	NATURAL	1	100-NM1-SMAF-2-50T									
1	BODY	NOTE 1	NOTE 2	1	100-NM1-SMAF-1									
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	3/1	ISSUE	1	GOLDEN		APPROVED	DATE	TITLE
												07-14-'16		SMA JACK TO N JACK ADAPTOR
												07-14-'16		DRAWING NO.
												07-14-'16		100-NF8-SMAF-50
												07-14-'16		FILE NO. R:\D\G\DWG\100\NF8-SMAF\50