

F

E

D

C

B

A

F


E

D

C

B

A

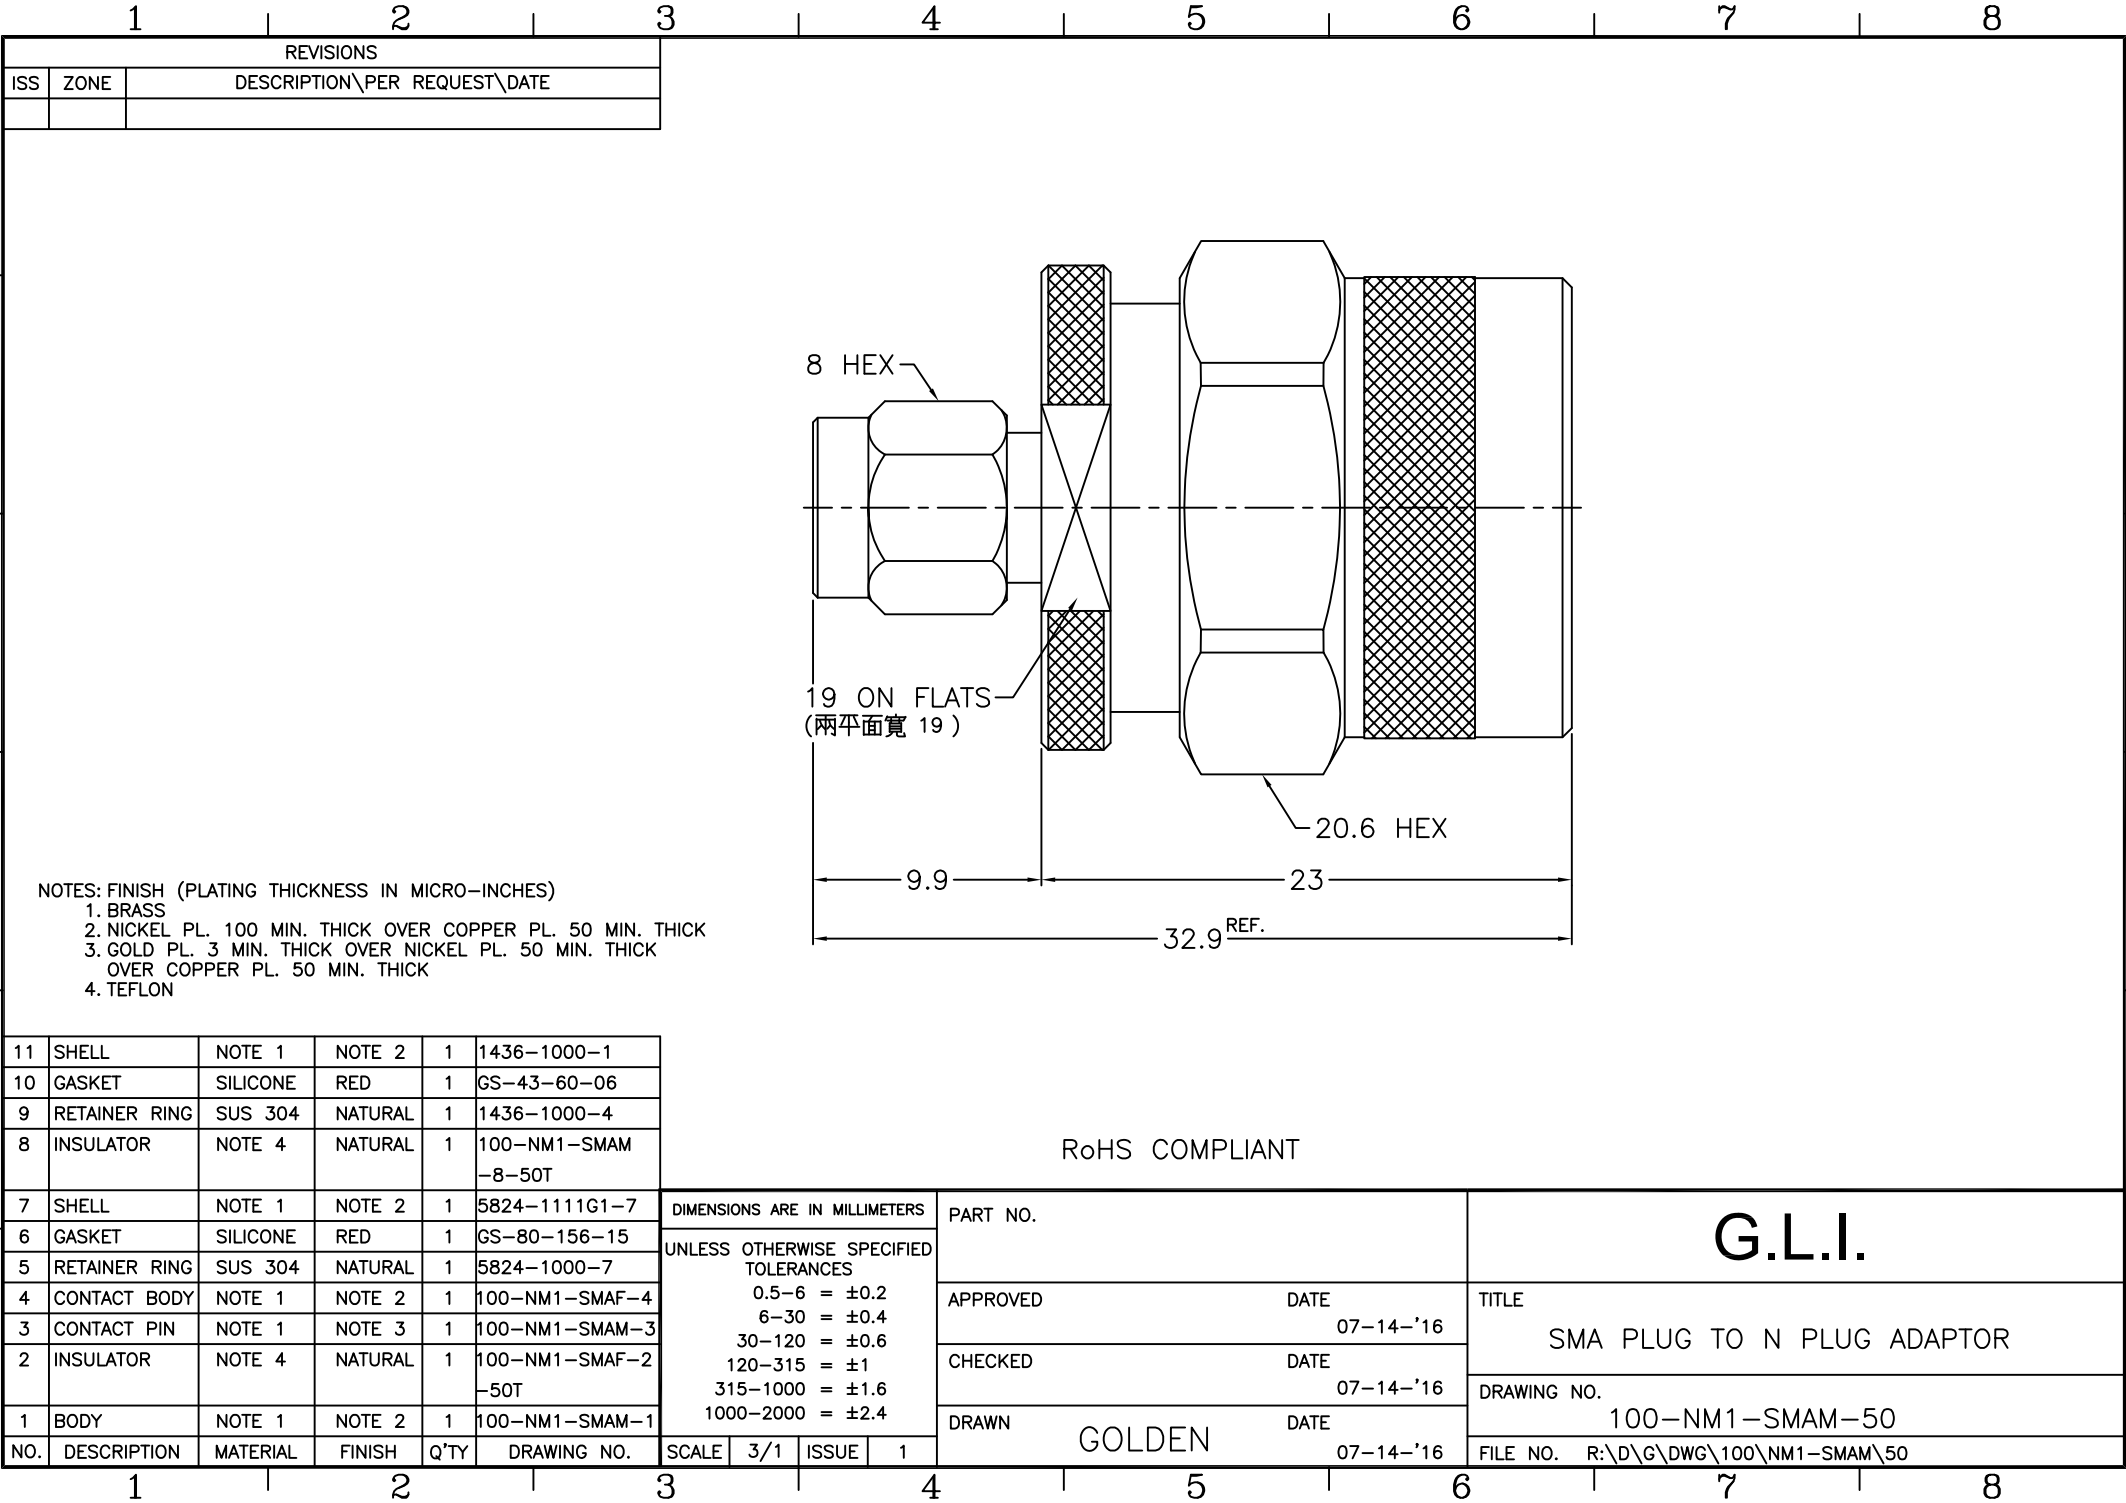

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1. BRASS
- 2. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK
- 3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
- 4. TEFLON

11	SHELL	NOTE 1	NOTE 2	1	1436-1000-1
10	GASKET	SILICONE	RED	1	GS-43-60-06
9	RETAINER RING	SUS 304	NATURAL	1	1436-1000-4
8	INSULATOR	NOTE 4	NATURAL	1	100-NM1-SMAM-8-50T
7	SHELL	NOTE 1	NOTE 2	1	5824-1111G1-7
6	GASKET	SILICONE	RED	1	GS-80-156-15
5	RETAINER RING	SUS 304	NATURAL	1	5824-1000-7
4	CONTACT BODY	NOTE 1	NOTE 2	1	100-NM1-SMAF-4
3	CONTACT PIN	NOTE 1	NOTE 3	1	100-NM1-SMAM-3
2	INSULATOR	NOTE 4	NATURAL	1	100-NM1-SMAF-2-50T
1	BODY	NOTE 1	NOTE 2	1	100-NM1-SMAM-1
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6 = ±0.2			
6-30 = ±0.4			
30-120 = ±0.6			
120-315 = ±1			
315-1000 = ±1.6			
1000-2000 = ±2.4			
SCALE	3/1	ISSUE	1

PART NO.	
APPROVED	DATE 07-14-'16
CHECKED	DATE 07-14-'16
DRAWN	DATE 07-14-'16

G.L.I.	
TITLE SMA PLUG TO N PLUG ADAPTOR	
DRAWING NO. 100-NM1-SMAM-50	
FILE NO. R:\D\G\DWG\100\NM1-SMAM\50	

RoHS COMPLIANT

GOLDEN