REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
B	ALL	CHANGED TO MANUFACTURE DRAWING\RD-DM030414003 \04-14-'14

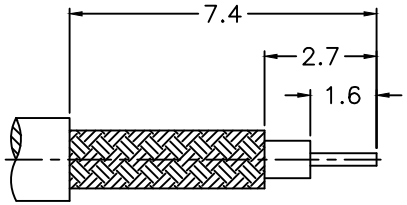

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

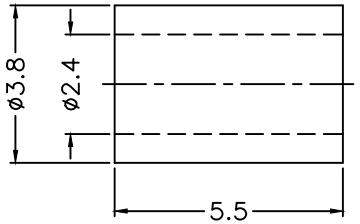

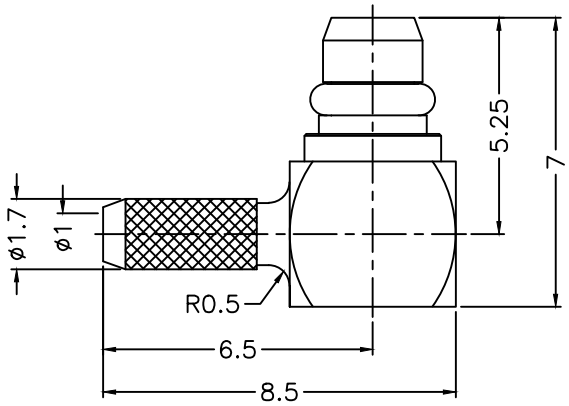





NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. THIN GOLD OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
3. BERYLLIUM COPPER
4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
5. TEFLON

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
7	FERRULE	COPPER	NOTE 2	1	FR-24-38-55C
6	COVER	NOTE 1	NOTE 2	1	CV-29-05
5	INSULATOR	NOTE 5	NATURAL	1	200-1182A1-5T
4	RETAINER RING	NOTE 3	NOTE 2	1	200-1000-5
3	CONTACT PIN	NOTE 1	NOTE 4	1	200-1182A1-3
2	INSULATOR	NOTE 5	NATURAL	1	200-1182A1-2 -50T
1	BODY	NOTE 1	NOTE 2	1	200-1112A2-1 -01

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

SCALE 6/1 ISSUE B

PART NO.

APPROVED DATE 04-14-'14

CHECKED DATE 04-14-'14

DRAWN DATE 04-14-'14

G.L.I.

TITLE MMCX R/A CRIMP PLUG (FOR RG-178B/U, 196A/U)

DRAWING NO. 200-1112A1-01-50

FILE NO. R:\D\G\DWG\200\1112A1\01\50