REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE



RECOMMENDED
CABLE STRIPPING DIM'S
（建議剝線尺寸）

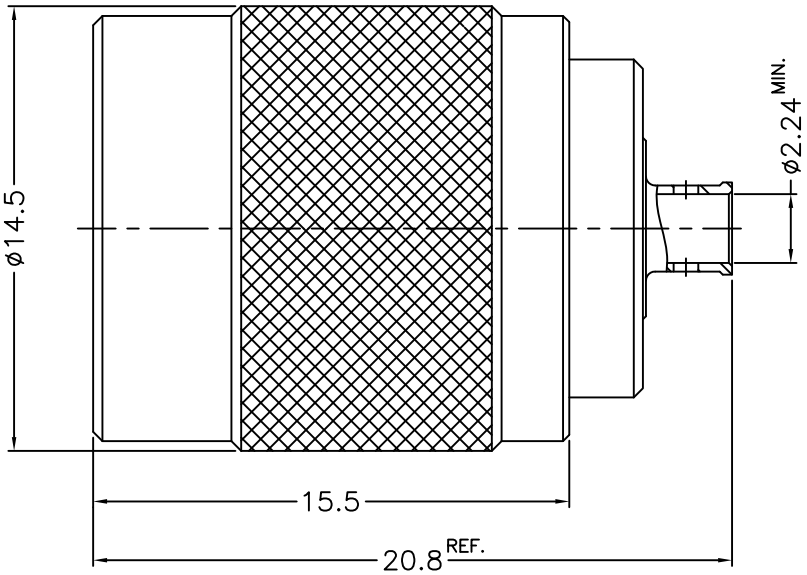

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK
3. PHOSPHOR BRONZE
4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
5. PTFE
6. THIN GOLD OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK

RoHS COMPLIANT

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
7	GASKET	SILICONE	RED		
6	SHELL	NOTE 1	NOTE 2		
5	RETAINER RING	NOTE 3	NATURAL		
4	BARREL	NOTE 1	NOTE 6		
3	CONTACT PIN	NOTE 3	NOTE 4		
2	INSULATOR	NOTE 5	NATURAL		
1	BODY	NOTE 1	NOTE 2		

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5–6 = ±0.2
6–30 = ±0.4
30–120 = ±0.6
120–315 = ±1
315–1000 = ±1.6
1000–2000 = ±2.4

SCALE 4/1 | ISSUE 1

PART NO.

APPROVED | DATE 04-12-'21
CHECKED | DATE 04-12-'21
DRAWN ANDY | DATE 04-12-'21

G.L.I.

TITLE
TNC DIRECT SOLDER PLUG
(FOR .085",.086" SEMI-RIGID, RG-405/U)

DRAWING NO.
71628-1181K1-28-50

FILE NO. R:\D\DWG\71628\1181K1\28\50